



Modular ice maker - Scale system
Daily production up to 670 kg

[illegible]

► Position n°

► Features & Plus

- Sub-cooled scale ice 99% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Specific volume $1 \text{ m}^3 = 430 \text{ kg}$ of ice
- Vertical fixed “no leak” evaporator
- Anticorodal alloy evaporator
- Removable and cleanable air filter
- Cleanable antiscale filter
- Air or water cooling system
- FDA approved - ABS plastic components
- Easy cleanable internal rounded surfaces
- RoHS Free
- Electromechanical operation
- Automatic water charge
- Standard and special voltages
- Frame in INOX



**HKR EQUIPMENT
CORPORATION**

**FOODSERVICE EQUIPMENT, SERVICE, PARTS,
ACCESSORIES, & CONSUMABLES**

9705 Kamagong St., San Antonio Village, Makati City

 (632) 8897 1569
  [hkreqipmentcorp.ph](https://www.instagram.com/hkrequipementcorp)
  [hkreqipmentcorp](https://www.facebook.com/hkrequipementcorp)
 sales@hkr.com.ph
  [hkr-equipmentcorporation](https://www.linkedin.com/company/hkr-equipmentcorporation)
  www.hkr.com.ph




Vertical fixed “no leak” evaporator



Removable and cleanable air filter



Cleanable antiscale filter



Frame in INOX

► Usable Bins

- Bin 350
- Bin 550V DS
- Double Roller Bin 100
- Double Roller Bin 500
- Double Roller Bin 1200

► Prod. 24h

	Air temp.		Water temp.		Kg	Lbs
	10° C	50° F	7° C	45° F	670	1477
	21° C	70° F	15° C	60° F	620	1367

2 Years Warranty
subject to limitations

► **Certifications available for this model**






Ice Scales

Muster 600



Modular ice maker - Scale system Daily production up to 670 kg

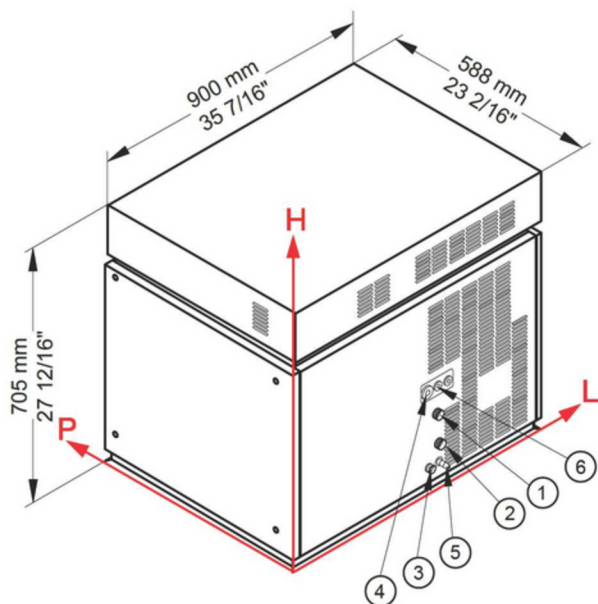

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	670 kg					
	50° F		1477 lbs				
	21° C			620 kg			
	70° F				1367 lbs		
	32° C					520 kg	
	90° F						1146 lbs

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 463 mm / 18 4/16" - 187 mm / 7 6/16" - 3/4"
- ② Cond. water in.: 463 mm / 18 4/16" - 120 mm / 4 12/16" - 3/4"
- ③ Water out.: 428 mm / 16 14/16" - 60 mm / 2 6/16" - 24 mm / 15/16"
- ④ Electrical connections: 434 mm / 17 1/16" - 257 mm / 10 2/16"
- ⑤ Cond. water out.: 472 mm / 18 9/16" - 60 mm / 2 6/16" - 12 mm / 8/16"
- ⑥ Remote connections.: 473 mm / 18 10/16" - 257 mm / 10 2/16"
- ② ③ Only for water cooling systems

► Technical information

Production in 24h	620 kg / 1367 lbs
Cooling system	A - W
Refrigerant	R452A
Standard voltage	400-415 V ~ 3N 50 Hz
Electrical consumption	2565 W
Fuse	16 A
Water consumption	A: 1 l/kg - 12,0 gal/100 lbs W: 7,4 l/kg - 88,7 gal/100 lbs

Sizes (L-P-H mm)	900 - 588 - 705
(L-P-H in)	35 7/16 - 23 2/16 - 27 12/16
Sizes with pack (L-P-H mm)	965 - 655 - 880
(L-P-H in)	38 - 25 13/16 - 34 10/16
Net weight	151 kg / 333 lbs
Gross weight	166 kg / 366 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information need to be considered at the following conditions:

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025



www.bremagroup.it
info@bremagroup.it

We are Brema

