



Modular ice maker - Scale system
Daily production up to **915 kg**

[illegible]

► Position n°

► Features & Plus

- Sub-cooled scale ice 99% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Specific volume $1 \text{ m}^3 = 430 \text{ kg}$ of ice
- Vertical fixed “no leak” evaporator
- AISI 316L SS evaporator
- Removable and cleanable air filter
- Cleanable antiscale filter
- Air or water cooling system
- FDA approved - ABS plastic components
- Easy cleanable internal rounded surfaces
- RoHS Free
- Electromechanical operation
- Automatic water charge
- Standard and special voltages
- Frame in INOX



**HKR EQUIPMENT
CORPORATION**

**FOODSERVICE EQUIPMENT, SERVICE, PARTS,
ACCESSORIES, & CONSUMABLES**

9705 Kamagong St., San Antonio Village, Makati City

 (632) 8897 1569
  hkrequipmentcorp.ph
  [hkrequipmentcorp](https://www.facebook.com/hkrequipmentcorp)
 sales@hkr.com.ph
  hkr-equipmentcorporation
  www.hkr.com.ph




Vertical fixed “no leak”
evaporator



Removable and cleanable air filter



Cleanable antiscale filter



Frame in INOX

► Usable Bins

- Bin 550V DS
- Double Roller Bin 500
- Double Roller Bin 1200

► Prod. 24h

	Air temp.		Water temp.		Kg	Lbs
	10° C	50° F	7° C	45° F	915	2017
	21° C	70° F	15° C	60° F	900	1984

2 Years Warranty
subject to limitations

► **Certifications available for this model**






Ice Scales

Muster 800



Modular ice maker - Scale system Daily production up to 915 kg

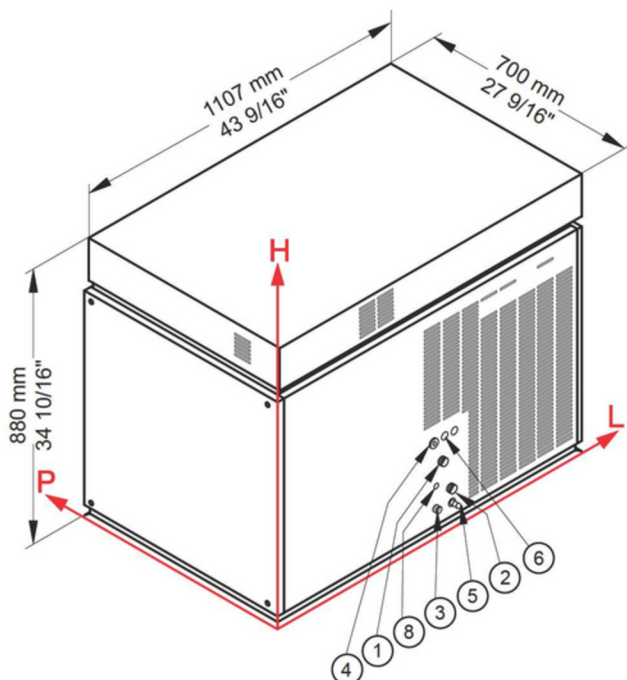

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	915 kg					
	50° F		2017 lbs				
	21° C			900 kg			
	70° F				1984 lbs		
	32° C					790 kg	
	90° F						1742 lbs

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 563 mm / 22 3/16" - 192 mm / 7 9/16" - 3/4"
- ② Cond. water in.: 563 mm / 22 3/16" - 125 mm / 4 15/16" - 3/4"
- ③ Water out.: 528 mm / 20 13/16" - 65 mm / 2 9/16" - 24 mm / 15/16"
- ④ Electrical connections: 532 mm / 20 15/16" - 262 mm / 10 5/16"
- ⑤ Cond. water out.: 573 mm / 22 9/16" - 65 mm / 2 9/16" - 12 mm / 8/16"
- ⑥ Remote connections.: 574 mm / 22 10/16" - 262 mm / 10 5/16"
- ⑧ Connection to feed pump: 515 mm / 20 5/16" - 159 mm / 10 5/16"
- ② ③ Only for water cooling systems

► Technical information

Production in 24h	900 kg / 1984 lbs
Cooling system	A - W
Refrigerant	R452A
Standard voltage	400-415 V ~ 3N 50 Hz
Electrical consumption	3205 W
Fuse	16 A
Water consumption	A: 1 l/kg - 12,0 gal/100 lbs W: 6,9 l/kg - 82,7 gal/100 lbs

Sizes (L-P-H mm)	1107 - 700 - 880
(L-P-H in)	43 9/16 - 27 9/16 - 34 10/16
Sizes with pack (L-P-H mm)	1210 - 800 - 1095
(L-P-H in)	47 10/16 - 31 8/16 - 43 2/16
Net weight	241 kg / 531 lbs
Gross weight	262 kg / 578 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information need to be considered at the following conditions:
Ambient temperature +21° C
Water temperature +15° C
Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025



www.bremagroup.it
info@bremaicigroup.it

We are Brema

