




## Modular ice maker - Vertical evaporator system Daily production up to 205 kg

Hotel  
Restaurant  
Fast food  
Bar  
Disco  
Fish market  
Supermarket  
Medical & SPA  
Industry

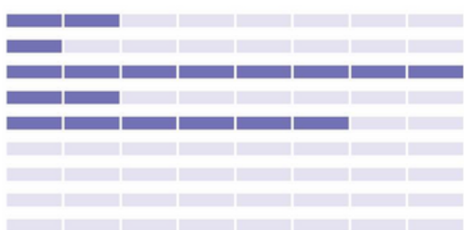

### ► Position n°



### ► Features & Plus

- Single and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surface
- RoHS Free
- Electromechanical operation
- ON-OFF rocker switch
- Automatic washing system
- Standard and special voltages



## HKR EQUIPMENT CORPORATION

FOODSERVICE EQUIPMENT, SERVICE, PARTS,  
ACCESSORIES, & CONSUMABLES

9705 Kamagong St., San Antonio Village, Makati City

(632) 8897 1569 [sales@hkr.com.ph](mailto:sales@hkr.com.ph) [hkr-equipmentcorporation](http://hkr-equipmentcorporation.com) [www.hkr.com.ph](http://www.hkr.com.ph)



Single and crystal cube



AISI 304 SS Scotch Brite finish




Removable and cleanable air filter

### ► Usable Bins

- Bin 240PE
- Bin 200
- Bin 350
- Double Roller Bin 100

### ► Available ice cube size



### ► Prod. 24h

|       | Air temp. |       | Water temp. |  | Kg  | Lbs |
|-------|-----------|-------|-------------|--|-----|-----|
| 10° C | 50° F     | 7° C  | 45° F       |  | 205 | 452 |
| 21° C | 70° F     | 15° C | 60° F       |  | 200 | 441 |

## 2 Years Warranty

subject to limitations

### ► Certifications available for this model






Fast Ice

# VM 500



## Modular ice maker - Vertical evaporator system Daily production up to 205 kg

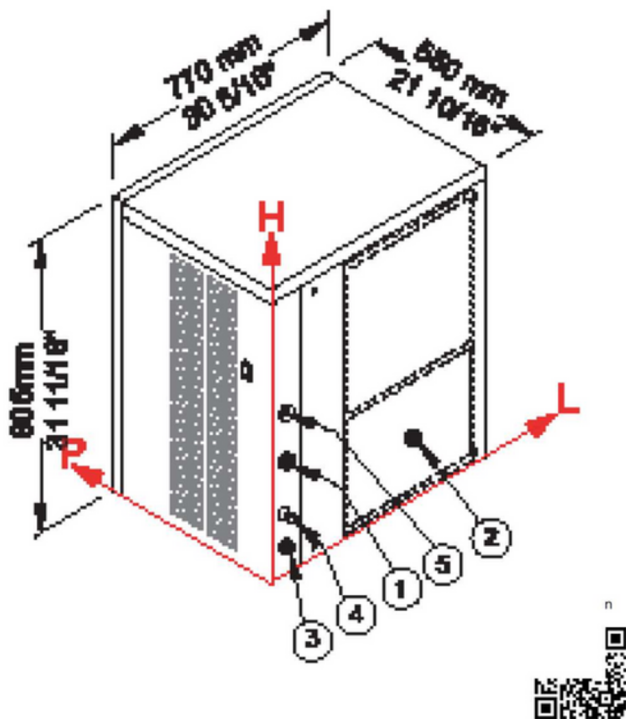

### ► Working conditions

- Location: Indoor

|                      | Min             | Max             |
|----------------------|-----------------|-----------------|
| Ambient temperature  | +10° C / +50° F | +43° C / 110° F |
| Water temperature    | +3° C / +37° F  | +32° C / +90° F |
| Voltage              | -10%            | +10%            |
| Water inlet pressure | 1bar (14 psi)   | 6bar (84 psi)   |

### ► Performances

|                 |       | Water temperature |         |        |         |        |         |
|-----------------|-------|-------------------|---------|--------|---------|--------|---------|
|                 |       | 7° C              | 45° F   | 15° C  | 60° F   | 21° C  | 70° F   |
| Air temperature | 10° C | 205 kg            |         |        |         |        |         |
|                 | 50° F |                   | 452 lbs |        |         |        |         |
|                 | 21° C |                   |         | 200 kg |         |        |         |
|                 | 70° F |                   |         |        | 441 lbs |        |         |
|                 | 32° C |                   |         |        |         | 163 kg |         |
|                 | 90° F |                   |         |        |         |        | 359 lbs |

### ► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 38 mm / 1 8/16" - 252 mm / 9 15/16" - 3/4"
- ③ Water out.: 32 mm / 1 4/16" - 40 mm / 1 9/16" - 24 mm / 15/16"
- ⑤ Electrical connections: 33 mm / 1 5/16" - 323 mm / 12 11/16"

- ② Cond. water in.: 375 mm / 14 12/16" - 115 mm / 4 8/16" - 3/4"
- ④ Cond. water out.: 28 mm / 1 2/16" - 93 mm / 3 11/16" - 12 mm / 8/16"
- ② ④ Only water cooling systems

### ► Technical information

|                           |                                        |
|---------------------------|----------------------------------------|
| Production in 24h         | 200 kg / 441 lbs                       |
| Cooling system            | A - W                                  |
| Kind of cube              | 7g                                     |
| Refrigerant               | R452A                                  |
| Standard voltage          | 220-240 V ~ 50 Hz                      |
| Average power consumption | 1600 W                                 |
| Fuse                      | 20 A                                   |
| Finish                    | AISI 304 stainless steel, scotch brite |

|                            |                                                                  |
|----------------------------|------------------------------------------------------------------|
| Water consumption          | A: 2,4 l/kg - 28,8 gal/100 lbs<br>W: 13 l/kg - 155,8 gal/100 lbs |
| Sizes (L-P-H mm)           | 770 - 550 - 805                                                  |
| (L-P-H in)                 | 30 5/16 - 21 10/16 - 31 11/16                                    |
| Sizes with pack (L-P-H mm) | 815 - 615 - 980                                                  |
| (L-P-H in)                 | 32 1/16 - 24 3/16 - 38 9/16                                      |
| Net weight                 | 90 kg / 198 lbs                                                  |
| Gross weight               | 101 kg / 223 lbs                                                 |

All the technical information need to be considered at the following conditions:  
Standard Cube (7 g)  
Ambient temperature +21° C  
Water temperature +15° C  
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025



[www.bremagroup.it](http://www.bremagroup.it)  
[info@bremagroup.it](mailto:info@bremagroup.it)

We are Brema

