



READYFLEX™
HOT HOLDING CABINET

Specifications

F.O.B. Sedalia, Missouri 65301



Model – RFHU-23 2.5" Deep

OPTIONS:

- ☐ Front and Back 4.3" Touchscreen
- ☐ Front 4.3" Touchscreen w/ Front Timer Bars
- ☐ Front 4.3" Touchscreen w/ Front and Back Timer Bars
- ☐ Dedicated Lid Options for High Volume Proteins

Electrical

- ☐ 120V - 60Hz
- ☐ 208/240V - 60Hz
- ☐ 220/240V - 50/60Hz



FOODSERVICE EQUIPMENT, SERVICE, PARTS,
ACCESSORIES, & CONSUMABLES

9705 Kamagong St., San Antonio Village, Makati City

(632) 8897 1569 [hkrequirementcorp.ph](https://www.hkrequipmentscorp.ph) [hkrequirementcorp](https://www.hkrequipmentscorp.ph)
sales@hkr.com.ph [hkr-equipmentcorporation](https://www.hkr.com.ph) www.hkr.com.ph

Agency Listings:



DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1201 ReadyFlex Holding Unit 2 inch deep

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

ReadyFlex™ Holding Unit - 2.5" Deep

- | | |
|----------------------------------|-------------------|
| ☐ RFHU-22 | 2X2 Configuration |
| ☐ RFHU-23 | 2X3 Configuration |
| ☐ RFHU-24 | 2X4 Configuration |
| ☐ RFHU-32 | 3X2 Configuration |
| ☐ RFHU-34 | 3X4 Configuration |
| ☐ RFHU-41 | 4X1 Configuration |
| ☐ RFHU-42 | 4X2 Configuration |

BODY:

- Stainless Steel Exterior construction for durability and ease of cleaning.
- Robust stainless steel pan cover.
- Multipan configuration flexibility for 1/3, 1/2 and Full Size Pans*

* Full Size Pans limited to 3 wide or larger units.

HEATER CONFIGURATIONS:

- Independent Top and Bottom Zoned Heat for maximum recipe flexibility.
- Easy configured for shelf heat, if desired.
- Quick heat up approximately 20 minutes.

CONTROLS:

- Full Color 4.3" Touchscreen Control
 - Easy to Use, Easy to Learn
 - Timer Bar functionality without timer bars.
- Start and Stop Timers
- Displays product being held, countdown timer, cook more alerts, and FIFO for each pan.
- Simplified, Intuitive Local Programming, Recipe Storage, & Menu Switch
- Multipan configuration
- Network Support

Built In Connectivity

- Wi-Fi (Dual Band 802.11 A/B/G/N 2.4Ghz/5Ghz)
- Ethernet (10/100Mbps)


USB Support

- Firmware Update
- Recipe Import/Export


Duke Connected Equipment Platform (DCEP) Support

- Asset Management
- Firmware Update
- Recipe Management
- Diagnostics

Specification subject to change



ReadyFlex™ Holding Unit - 2.5" Deep

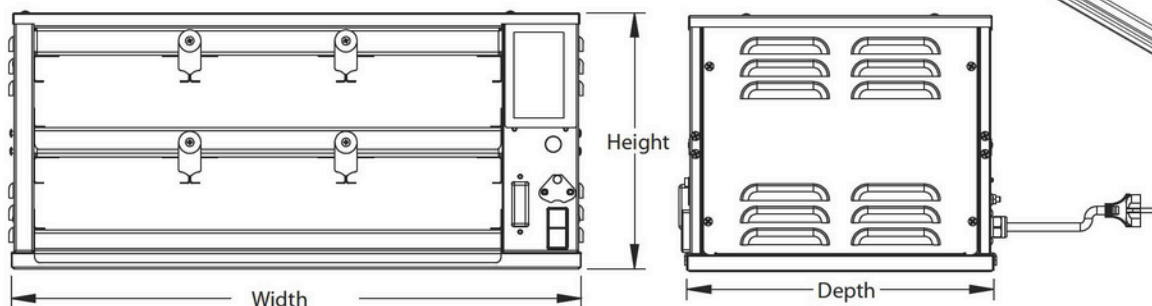

RFHU-23 Shown Above

ELECTRICAL SPECIFICATION/CORD RATING (TOP AND BOTTOM HEAT)

Model	120V - 60Hz		208/240 V - 60Hz		220/240V - 50/60Hz	
	Amps	NEMA	Amps	NEMA	Amps	Schuko
RFHU-22	10	5-15P	5.8/6.7	6-15P	6.7	CEE7 VII
RFHU-23	10	5-15P	8.7/10	6-15P	10.0	CEE7 VII
RFHU-24	10	5-15P	8.7/10	6-15P	10.0	CEE7 VII
RFHU-32	10	5-15P	8.7/10	6-15P	10.0	CEE7 VII
RFHU-34	N/A	N/A	13/15	6-20P	15	CEE7 VII
RFHU-41	10	5-15P	5.8/6.7	6-15P	6.7	CEE7 VII
RFHU-42	10	5-15P	8.7/10	6-15P	10.0	CEE7 VII

DIMENSIONS

Freight Class: 100

DIMENSIONS	2.5" Deep Pan Config						Height Class: 100		
Model	Height		Width		Depth <i>(body only)</i>		Cubic Ft. Crated	Weight	
	in.	cm	in.	cm	in.	cm		lbs	kgs
RFHU-22	11.8	30.0	19.0	48.3	14.1	35.7	6.8	85	38.6
RFHU-23	11.8	30.0	26.0	66.0	14.1	35.7	8.8	100	45.4
RFHU-24	11.8	30.0	33.0	83.8	14.1	35.7	10.9	120	54.4
RFHU-32	16.6	42.2	19.0	48.3	14.1	35.7	8.3	100	45.4
RFHU-34	16.6	42.2	33.0	83.8	14.1	35.7	13.3	160	72.6
RFHU-41	21.5	54.6	11.8	30.0	14.1	37.5	7.0	90	40.8
RFHU-42	21.5	54.6	19.0	48.3	14.1	35.7	9.8	125	56.7

This product may be covered by one or more patents or pending patent applications. For more details, see www.dukemfg.com/patents

