

Fast and energy saving

TDR 5 Manual



The Turbo Deli Rotisserie is the fastest original rotisserie in the industry. The TDR's cavity is fed with fresh air, cooking a rotisserie chicken as it is meant to be: **crispy and delicious while maintaining an attractive appearance for hours.**

The TDR pushes the air throughout the cavity, resulting in an improved heat transfer on the products. It consumes less electricity during the preparation process. Add to this the improved cooking time and you have the most energy efficient rotisserie and a high output.

The double glass doors create a striking, large display section that maximises your products' visual appeal to customers! It also offers perfect insulation with contact temperatures below 158°F.

HKR EQUIPMENT CORPORATION
FOODSERVICE EQUIPMENT, SERVICE, PARTS,
ACCESSORIES, & CONSUMABLES

9705 Kamagong St., San Antonio Village, Makati City

(632) 8897 1569 hkrequipmentcorp.ph hkrequipmentcorp.com
sales@hkr.com.ph hkr-equipmentcorporation.com www.hkr.com.ph



Manual controls



Rotor button on customer side



Ventless hood (optional)



Matching stand on casters

Features TDR 5 Manual

Top features

- Controls with manual settings
- Set time, temperature and start of the rotisserie
- Efficient heat transfer reduces energy consumption

Standard characteristics

- 5 Meat fork, V-spit, basket or rack positions
- Rotor for up to 20 chicken (2.6 lbs) per batch
- Outstanding food quality: high speed convection for even cooking
- Outstanding food quality: radiant heat for uniform browning
- Striking display created by infrared halogen lamps
- Rotor button on both sides
- Safety stop when opening the door
- Double glass doors, safe to touch
- Door at control side, optional door on customer side
- No water and drain connections needed
- Removable parts for easy cleaning
- Simplified deep cleaning
- High quality stainless steel construction, interior and exterior
- Matching stand on casters




Accessories

- Meat forks
- Multi-purpose baskets
- V-spits
- Chicken racks
- Door handle set on customer side for pass through operation




Optional

- Double stacked unit
- Ventless hood

TDR 5

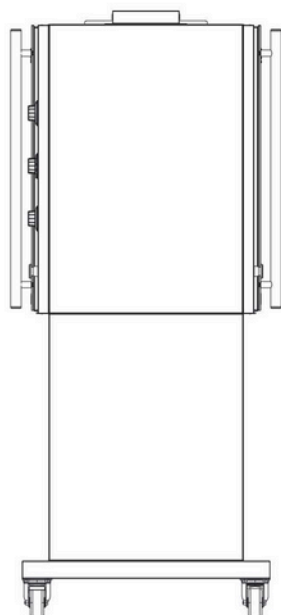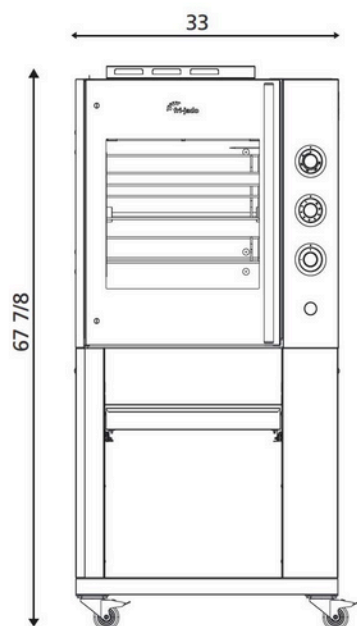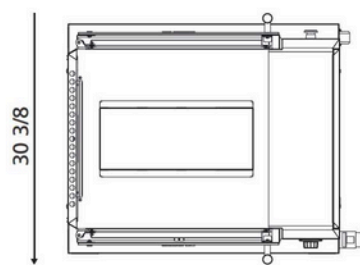

TDR 5+5

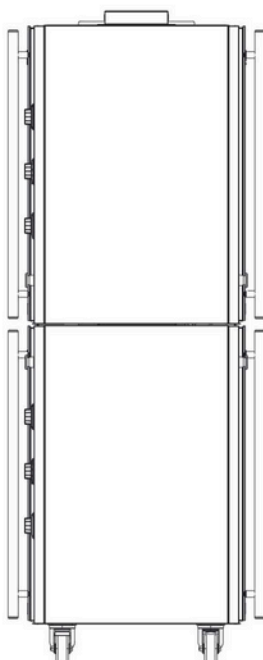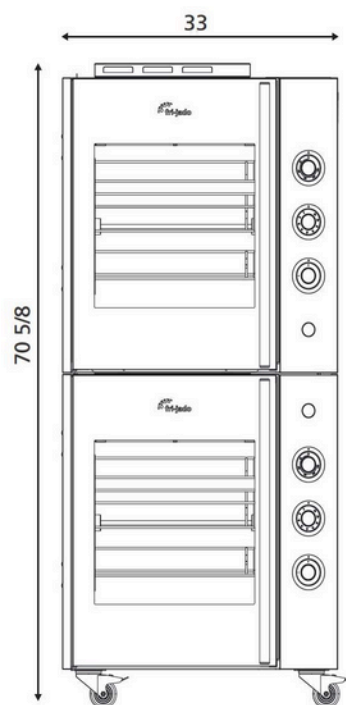

TDR 5 Manual

- 1 Power cable, 75"
- 2 Exhaust opening
- 3 Free space
- 4 Location for socket

Dimensions TDR 5

Width	33"
Depth	30 3/8"
Height on stand	67 7/8"

Technical data TDR 5

Net weight	287 lbs
Gross weight	353 lbs
Voltage	208 V
Phase	3~
Frequency	50/60 Hz
Power	6.6 kW
Plug	NEMA 15-30P

Dimensions TDR 5+5

Width	33"
Depth	30 3/8"
Height	70 5/8"

Technical data TDR 5+5

Net weight	586 lbs
Gross weight	661 lbs
Voltage	208 V
Phase	3~
Frequency	50/60 Hz
Power	6.6 kW (2x)
Plug	NEMA 15-30P (2x)

Specifications and technical data are subject to amendment without prior notice.

These are basic drawings. For more detailed technical information, please refer to the installation manual at www.frijado.com.



Fri-Jado Inc.
1401 Davey Road
Suite 100
Woodridge IL 60517
Toll free 877-374-5236
Fax 630-689-1424
e-mail us.info@frijado.com
usa.frijado.com