

MENUMASTER[®]

Commercial



FOODSERVICE EQUIPMENT, SERVICE, PARTS,
ACCESSORIES, & CONSUMABLES

9705 Kamagong St., San Antonio Village, Makati City

(632) 8897 1569 | hkrequirementcorp.ph | hkrequirementcorp
sales@hkr.com.ph | hkr-equipmentcorporation | www.hkr.com.ph



Left to right: MRC window door style and MRC solid door style (*S2D)

Chef Line | Heavy Volume
This category of microwave oven is ideal for...

Applications

- Full service restaurants
- Prep stations
- Delis
- Quick service restaurants
- Casual dining
- Schools
- Healthcare
- Grocery Stores
- Food courts

Through put potential by oven wattage (items per hour)

Food item	1700W	2200W	3000W
Steamed Shrimp (1lb (454g))	31	36	48
Fresh Green Beans (12oz (340g))	36	42	55
1 Baked Potato (10oz (283g))	24	30	36
Salmon (6oz (170g))	27	31	33
Lobster Tail (4oz (114g))	23	25	31
Quinoa (1cup (150g))	5	5	6
Steamed Rice (8cups (1.2kg))	3	5	6
Berry Cobbler (7oz (200g))	65	80	120

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times:
testkitchen@acpsolutions.com



Heavy Volume Menumaster[®] Commercial MRC Series

Power Output

- 1700-3000 Watts of power
- Unique method of microwave energy distribution provides superior even heating throughout the entire cavity

Multi-language universal operation, with programming flexibility

- Oven interface and programming software supports 20 languages
- Smart USB connectivity standard
- Compatible with ACP Programming Application
- Stores up to 100 programmable menu items

Easy to Use

- 11 power levels and 4 cooking stages for cooking flexibility
- Multiple quantity function automatically calculates cooking times for multiple portions
- Automatic Voltage Sensor adjusts to the power supply (**North America & Korea only**)
- See-through door and lighted interior for monitoring without opening the door (***S2D Models excluded**)
- Ample 1 cubic ft. (28 liter) capacity accommodates two standard 4" (102mm) deep half-sized pans
- Stackable to save valuable counter space (***3000W models excluded**)

Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and increased durability
- Removable, cleanable air filter protects oven components
- Constructed to withstand the foodservice environment
- Interior borosilicate tray is sealed and recessed to reduce plate-to-shelf edge impact and keep spills contained

Optional Accessories

- Cavity shelf (SE10)
- Stainless cart/equipment stands: (CA24, CA30)
- Non-stick baskets (NB10/S, TB10/S, SB10/S, MB10/S)
- Oven Cleaner and Shield Protectant (CL10**, SH10**)

Service

All products are backed by the ACP, Inc.
24/7 ComServ Support Center

Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at www.acpsolutions.com/warranty

Safety and Sanitation

This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, FDA, CE, Korea Certification (KC), and National Institute of Metrology, Quality and Technology (INMETRO).



866-811-8559



**Only shipped in U.S.A.



© 2020 ACP, Inc.
Cedar Rapids, Iowa 52404

225 49th Ave. Dr. SW Cedar Rapids, IA 52404 U.S.A.

800-233-2366

319-368-8120


Fax: 319-368-8198

www.acpsolutions.com

AIA File #:

Specification #:

MenuMaster® Commercial Microwave MRC Series | Heavy Volume

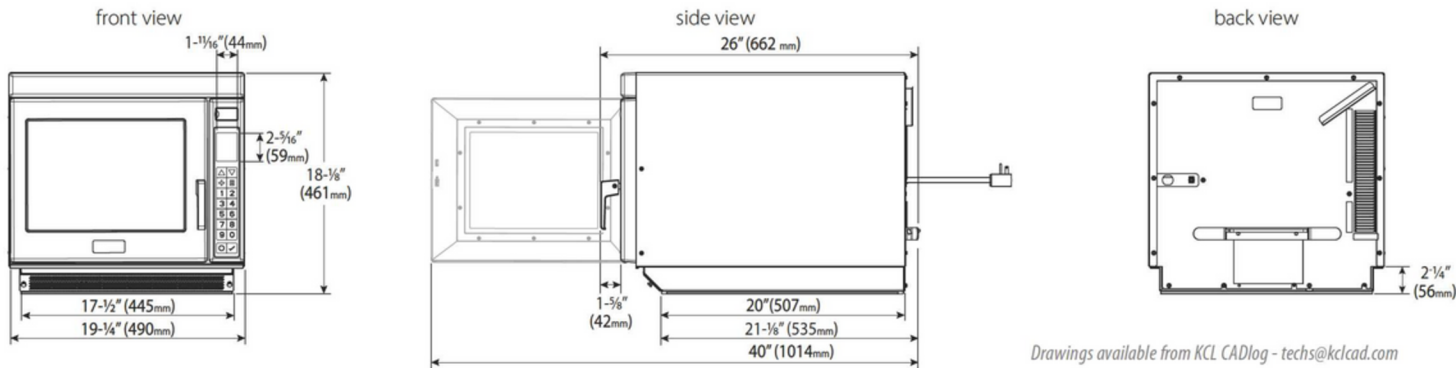

Drawings available from KCL CADlog - techs@kclcad.com

Dimensions

Exterior	H 18 1/8" (461)	W 19 1/4" (490)	D† 26" (662)
Cavity	H 8 1/2" (216)	W 13" (330)	D 15" (381)
Usable Cavity Space	1.0 cubic ft. (28 liter)		
Door Depth	40" (1014), 90°+ door open		
Installation Clearance	Top: 2" (51)	Sides: 1" (25)	Back: None
Shipping Carton	H 21 1/2" (546)	W 21 3/4" (553)	D 28 1/4" (718)

Weight

Model Type	Product Weight	Ship weight (approx.)
2 × Magnetron	94 lbs. (43 kg.)	101 lbs. (46 Kg.)
3 × Magnetron	115 lbs. (52 kg.)	123 lbs. (56 Kg.)

Measurements are US Standard. Measurements in () are in millimeters.

* IEC 60705 Tested

† Includes handle

Features

Configuration	Countertop
Display	2.8" (71mm) Color LCD
USB Port	Yes
Control System	Touchpad
Programmable Control	Yes, 10 pads
Braille	Overlay available
Settings Programmable	100
Max. Cooking Time	60:00
Microwave Distribution	2 × Magnetron Models: 2 rotating antennas-1 top; 1 bottom
	3 × Magnetron Models: 3 rotating antennas-2 top; 1 bottom
Power Levels	11
Defrost	Yes, power level 2
Time Entry Option	Yes
Multiple Portion Setting	Yes, X2 by default, optional up to X9
Stage Cooking	4 stages
Interior Light	Window Door Style: Yes, LED
	Solid Door Style: No
Air Filter	Yes, 1 removable with cleaning reminder
Signal	End of cycle, adjustable
Door Handle	Lift & Pull
Exterior Finish	Stainless steel
Interior Finish	Stainless steel with sealed-in borosilicate tray

Electrical Configuration

Region	Model#/UPC	Automatic Voltage Sensor	Door Style	Stackable	Power Consumption	Power Output (microwave)	Power Source	Plug Configuration	Cord Length	Frequency	Magnetron
North America single phase	MRC17S2 728028020663	Yes	Window	Yes	2700W, 13.8A	1700W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20P	5 ft. (1.5m)	2450MHz	2
North America single phase	MRC17S2D 728028470666	Yes	Solid	Yes	2700W, 13.8A	1700W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20P	5 ft. (1.5m)	2450MHz	2
North America single phase	MRC22S2 728028020670	Yes	Window	Yes	3200W, 15.4A	2200W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20P	5 ft. (1.5m)	2450MHz	2
North America single phase	MRC22S2D 728028470673	Yes	Solid	Yes	3200W, 15.4A	2200W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20P	5 ft. (1.5m)	2450MHz	2
North America single phase	MRC30S2 728028020687	Yes	Window	No	4400W, 21.2A	3000W*	208/240V, 60Hz, 30A, single phase	NEMA 6-30P	5 ft. (1.5m)	2450MHz	3
North America single phase	MRC30S2D 728028470680	Yes	Solid	No	4400W, 21.2A	3000W*	208/240V, 60Hz, 30A, single phase	NEMA 6-30P	5 ft. (1.5m)	2450MHz	3
Brazil single phase	MRC17S2B 728028244434	No	Window	Yes	2700W, 13A	1700W*	220V, 60Hz, 15A, single phase	TYPE YP-05 NBR 14136	5 ft. (1.5m)	2450MHz	2
Korea single phase	MRC17S2K 728028377088	Yes	Window	Yes	2700W, 13A	1700W*	208/240V, 60Hz, 15A, single phase	KS approved Type F	5 ft. (1.5m)	2450MHz	2
Saudi Arabia single phase	MRC17S2SA 728028315790	No	Window	Yes	2700W, 11.9A	1700W*	220V, 60Hz, 13A, single phase	BS1363/A	5.5 ft. (1.7m)	2450MHz	2



225 49th Ave. Dr. SW, Cedar Rapids, IA 52404 U.S.A.
800-233-2366 • 319-368-8120 • Fax: 319-368-8198
www.acpsolutions.com

Part No. 20271602

Updated 1/22/2020

© 2020 ACP, Inc., Cedar Rapids, Iowa 52404

an Ali Group Company



The Spirit of Excellence

Specification #:

AIA File #: