




HOSHIZAKI

> KM-470AJ

Daily ice production capacity up to **495 KG**




This KM series ice maker produces clear, crescent shaped ice that is extremely versatile. It includes a double-sided stainless steel evaporator, which requires fewer cycles to produce a full bin of ice, thereby reducing energy consumption.




CRESCENT ICE MAKER SERIES

FEATURES

- > Individual premium crescent cube with no ice bridging.
- > Exceptionally hard crystal clear cubes that melt slowly.
- > Slide in air filter at front for easy cleaning maintaining performance efficiency.
- > Double-sided stainless steel evaporator for all water conditions produces more ice in less cycles.
- > Snap in water tank design - easy to replace.
- > Durable stainless steel exterior.
- > Low water electrical consumption.
- > Flush mount to rear wall.
- > Good in hard water areas.

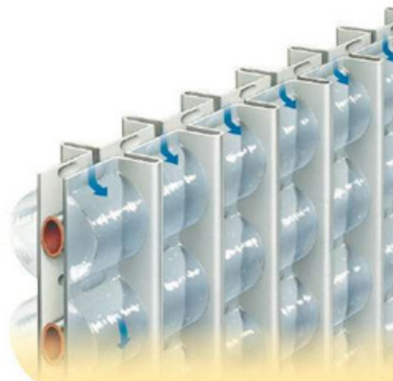

ICE SIZE



CERTIFICATION




DIMENSIONS & SPECIFICATION


TOP SIDE




FRONT SIDE




RIGHT SIDE



BACK SIDE

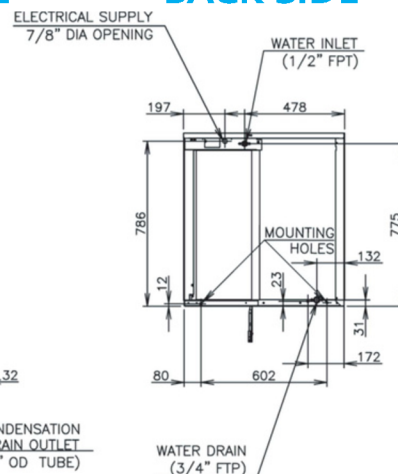

BOTTOM SIDE



TEMP BIN CONTROL
(SHOWN INSTALLED)

CONDENSATION
DRAIN OUTLET
(3/8" OD TUBE)

WATER DRAIN
(3/4" FTP)

KM-470AJ		
ICE DIMENSIONS (WxDxH)	38.1 x 28.5 x 12.7 mm	
DIMENSIONS (WxDxH)	762 x 695 x 825 mm	
PACKAGE DIMENSIONS (WxDxH)	855 x 843 x 983 mm	
WEIGHT (NET/GROSS)	122 KG / 136 KG	
AMPERAGE / STARTING AMPERAGE	11.2 A / 55 A	
ELECTRICAL CONSUMPTION (AT32°C/WT21°C)	1850 W	
REFRIGERANT CHARGE	R404A/ 1400g	
HEAT REJECTION (AT32°C/WT21°C)	3690 W	
ICE PRODUCTION PER 24H (15MM)	(AT10°C/WT10°C)	495 KG
	(AT21°C/WT15°C)	480 KG
	(AT32°C/WT21°C)	380 KG
ICE PRODUCTION PER CYCLE (AT32°C/WT21°C)	Approx. 9.7 KG / 960 pcs FREEZE CYCLE TIME PER CYCLE 25 minutes	
WATER CONSUMPTION PER 24H (AT32°C/WT21°C)	0.65 m ³ ≈ 1.7 L / 1 KG ice	

NOTE:

All dimensions indicated are
Width x Depth x Height in mm
*60Hz units are available on request

OPERATING CONDITIONS:

• Voltage Range: 198V-254V • Ambient Temperature: 7°- 38°C • Water Supply:
7°- 32°C / 0.07-0.78 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50Hz

HKR EQUIPMENT CORPORATION

FOODSERVICE EQUIPMENT, SERVICE, PARTS,
ACCESSORIES, & CONSUMABLES

9705 Kamagong St., San Antonio Village, Makati City

(632) 8897 1569 hkrequipmentcorp.ph hkrequipmentcorp
sales@hkr.com.ph hkr-equipmentcorporation www.hkr.com.ph